



XG1212AC

MOBILE ELEVATING WORK PLATFORM

Comply with AS/NZS/CE/ANSI/CSA



XG1212AC

MOBILE ELEVATING WORK PLATFORM

OVERVIEW AND FEATURES


The new mobile elevating work platform developed and produced by XCMG has a maximum working height of 12m, a width of 1.17m, a rated load of 320kg, a platform extension length of 0.9m and a maximum climbing capacity of 25%; it has a compact structure, advanced performance and complete

safety protection, and is a special model tailor-made for construction users. It can be widely used in various industries such as factories, warehouses, airports and stations, and is especially suitable for small working environments.

PERFORMANCE ADVANTAGES AND FEATURES

- It adopts an energy-efficient electric drive system with zero emissions and low noise, and is equipped with non-marking tyres for easy and convenient construction in closed environments such as office buildings, hospitals and schools, minimising the impact on the environment.
- It adopts active safety protection mechanism such as pothole protection mechanism, and is equipped with self-designed safety control system, which fully satisfies customers' multiple demands for safety, reliability and intelligence with humanized design ideas, perfect safety protection and rich optional combinations.
- The work platform can be extended and retracted for greater working space, and with the foldable fence it is easier to transport and relocate.
- The unique "zero inner turning radius" design allows for flexible use in narrow spaces.

- Maximum load capacity of 320kg, an industry-leading level
- Maximum travel speed of 4km/h with a 25% climbing capacity, making driving easier.

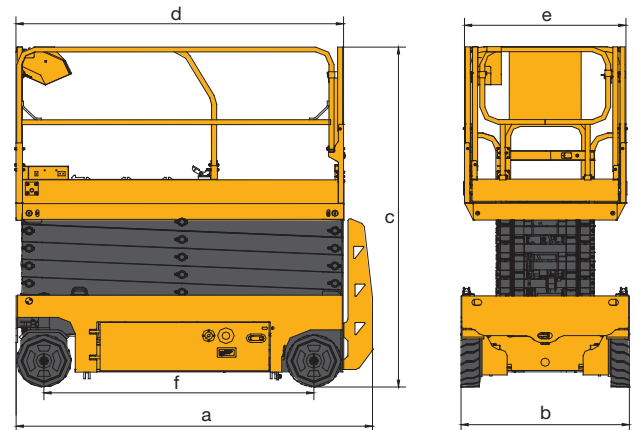

OPTIONS

- Platform AC power supply
- Compressed air line to platform
- Platform work lamp

MAIN PARAMETER

| Item | | Metric | Imperial |
|--|--|-----------------------------------|--------------------------------------|
| Machine Dimensions | a.Length (without ladder) | 2.477(2.267)m | 8 ft 2 in (7 ft 5 in) |
| | b.Width | 1.17m | 3 ft 10 in |
| | c.Height (Platform Folded) | 2.48(1.93)m | 8 ft 2 in (6 ft 4 in) |
| f.Wheel base | | 1.877m | 6 ft 2 in |
| Wheel track | | 1.043m | 3 ft 5 in |
| Minimum ground clearance (Pot hole protector - raised/lowered) | | 0.1m/0.02m | 3.94 in/0.79 in |
| Dimension of working platform | d.Length | 2.28m | 7 ft 6 in |
| | e.Width | 1.12m | 3 ft 8 in |
| | Height | 1.2605m | 4 ft 2 in |
| | Extension length of auxiliary platform | 0.9m | 2 ft 11 in |
| Machine Center of Gravity | Horizontal distance to front axle | 0.95m | 3 ft 1 in |
| | Height of Center of Gravity | 0.663m | 2 ft 2 in |
| Total weight of machine | | 3000kg | 6614 lbs |
| Maximum height of platform | | 10m | 32 ft 10 in |
| Minimum height of platform | | 1.34m | 4 ft 5 in |
| Maximum working height | | 12m | 39 ft 4 in |
| Minimum turning radius (inner wheel/outer wheel) | | 0/2.3m | 0/7 ft 7 in |
| Work platform lift capacity | | 320kg | 705 lbs |
| Work platform lift capacity - platform extended | | 115kg | 254 lbs |
| Work platform lift time | | 50-75 S | 50-75 S |
| Work platform descend time | | 43-65 S | 43-65 S |
| Maximum Drive Speed - Lowered | | 4km/h | 2.49 mph |
| Maximum Drive Speed - Elevated | | 0.8km/h | 0.50 mph |
| Maximum theoretical gradeability | | 25% | 25% |
| Tilt warning angle (side, forward and backward) | | 1.5/3° | 1.5/3° |
| Rated motor power (Lifting/travelling motor rating) | | 3.3kW-4.5kW /0.87kW | 3.3kW-4.5kW /0.87kW |
| Battery | Model | 3-EV-225 | 3-EV-225 |
| | Voltage | 24V | 24V |
| | Capacity | 280Ah | 280Ah |
| | Manufacturer | LEOCH | LEOCH |
| Tire models | | Non-marking and solid/381mm×127mm | Non-marking and solid/1 ft 3 in×5 in |