



SOLID
TO SUCCEED

ARTICULATED BOOM LIFT

XGA12K



The print does not belong to the contract, nor a part of the vehicle purchase contract. We reserve the right to revise the product model, parameters, configuration based on the continuous improvement requirements of the product, without prior notice. Pictures are for reference only, and the specific product shall depend on the real product.

XGA12K

Articulated boom lift

FEATURES

MEASUREMENTS

12.5m working height
Up to 230kg lift capacity

PRODUCTIVITY


1.4m×0.7m steel platform
4 driving wheels
2 steering wheels
4 braking wheels
45% theoretical gradeability
Axle balance system
Platform automatic leveling system
Fully proportional multi-function controls
Enable switch
Hourmeter record
Tilt alarm
Lift and lower alarm
Drive alarm
355° non-continuous turntable rotation
Lockable canopy
Positive defense system
Thumb rocker steering
Full time positive traction drive
Telematics pre-interface
Engine air pre-filter kit

POWER

Engine protection devices
Kubota Euro stage V emission
12V DC emergency power

OPTIONS

Tool tray
Platform working light
Air line to platform
Cold Resistant, Fire Resistant, Biodegradable Hydraulic Fluid

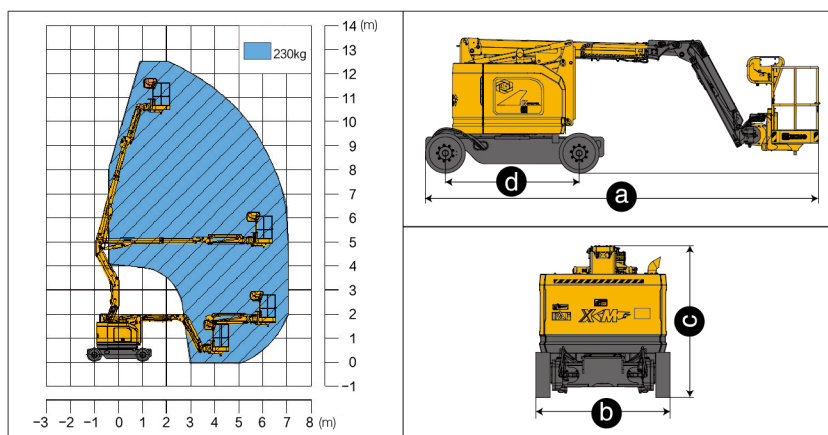

Item	Unit	XGA12K
Working height	m	12.5
Platform height	m	10.5
Working radius	m	7.1
Lift capacity	kg	230
Occupant capacity	-	/
Working Slope	°	/
1st Boom luffing range	°	-6~+69
2nd Boom luffing range	°	-1.5~+75
Fly jib luffing range	°	-60~+70
Turntable rotation	°	355
Platform rotation	°	160
Drive speed (retracted/extended)	km/h	4.8/0.6
Turning radius(inside/outside)	m	2.32/3.98
Tailswing	mm	0
Ground clearance	mm	200
Gradeability	%	45
Tires	-	23.6×7.5
Power source	-	Kubota D1105
Rated power	kW/(r/min)	18.5/(3000)
Fuel tank	L	40
Hydraulic tank	L	39
Weight	kg	5600
Platform size	mm	1400×700×1150
Transport dimension	mm	/
a Length (transportation)	mm	5900
b Width	mm	1800
c Height	mm	2020
d Wheelbase	mm	2010

SOLID TO SUCCEED